


Avdel® Maxlok® 1901 Series Lockbolt Fastener



For installation information please refer to the tooling overview and manuals on our website.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Brazier head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Pin: Medium carbon steel*	Tige: Acier*	Bolzen: Stahl*	Bullone: Acciaio a carbonio*	Vástago: Acero medio al carbono*
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente
Collar: Low carbon steel**	Bague: Acier bas carbone**	Schließring: Stahl**	Collare: Acciaio a basso tenore di carbonio**	Collar: Acero bajo en carbono**
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente

*: BS 3111 Type 10, SAE 10B35 DIN 1654, 35B2 **: SAE 1008 EN 10263-2 C8C

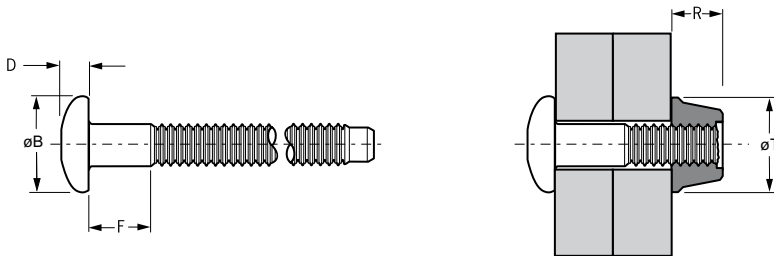

Ø	ØB		max.	ØB	D	F	R	ØT	kN ¹⁾	kN ¹⁾	Part No/ref	Part No/ref
	min.	max.										
4.8 (3/16")	1.6	15.9	5.16	10.1	3.2	2.3	8.7	10.1	8.25	10.01	01901-70610	01981-70600
	7.9	31.7				8.4					01901-70620	
6.4 (1/4")	1.6	15.9	6.75	13.3	3.9	2.2	13.5	13.2	11.79	16.01	01901-70810	01981-70800
	7.9	31.7				9.1					01901-70820	

all dimensions in mm / en millimètre / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas

STANLEY
Engineered Fastening

© 2013 Stanley Black & Decker, Inc., Rev. 04.2008 • www.StanleyEngineeredFastening.com

Maxlok® is a trademark of Avdel UK Ltd.

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy. Your local Avdel representative is at your disposal should you need to confirm latest information.