


Monobolt® 2771



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Protruding head	Tête bombée	Flachrundkopf	Testa tonda	Cabeza alomada
Body: steel	Corps: Acier	Hülse: Stahl	Corpo: Acciaio	Cuerpo: Acero
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar passiviert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente
Stem: carbon boron steel	Tige: Acier	Dorn: Stahl	Gambo: Acciaio	Vástago: Acero
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente

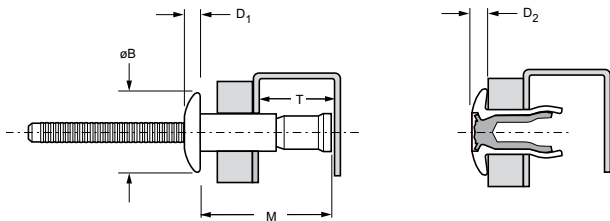

ø	Ø B		M		ø B	D ₁	T	D ₂	kN ¹⁾	kN ¹⁾	Part No/ref	
	min.	max.	min.	max.								max.
4.8 (3/16")	1.63	6.86	4.9	5.1	18.2	10.1	2.1	10.5	1.9	6.4	5.1	02771-00613
	1.63	11.10			24.5			13.5				02771-00617
6.4 (1/4")	2.03	9.53	6.6	7.0	23.7	13.4	2.9	12.2	2.7	11.7	10.4	02771-00817
	2.03	15.87			33.0			16.4				02771-00824
10.0 (3/8")	3.04	15.88	9.95	10.4	36.2	20.3	4.1	22.3	4.0	26.3	16.5	02771-01228 ²⁾

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas

2) Deutsches Institut für Bautechnik (DIBt) Zulassung Nr. Z-14.1-4 Anlage 2-24